

Abbreviations

\bar{C} = Centre Line
NOM = Nominal



C/O = Clear Opening
O/A = Overall

S = Span
L = Length


W = Width
D = Depth

Before starting work refer to installation instructions

DO NOT SCALE

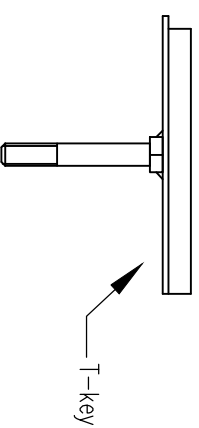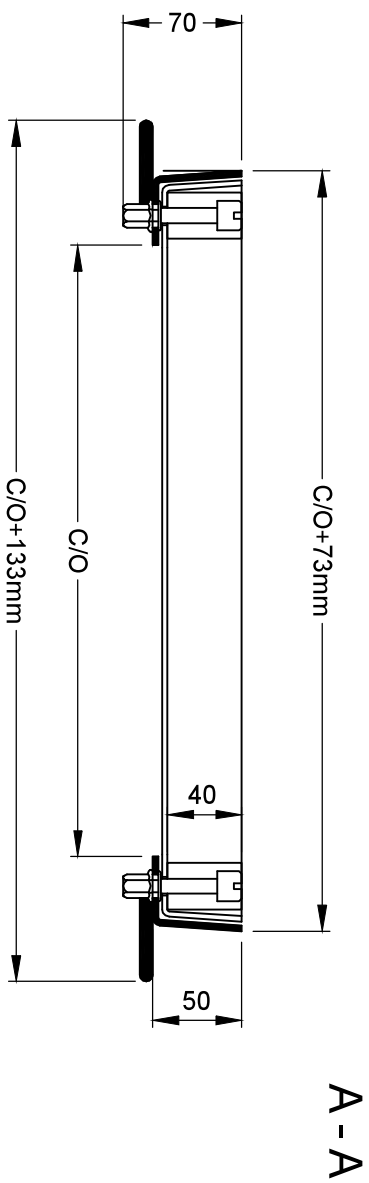

Holdfast 'concrete anchor' for tying into concrete surround

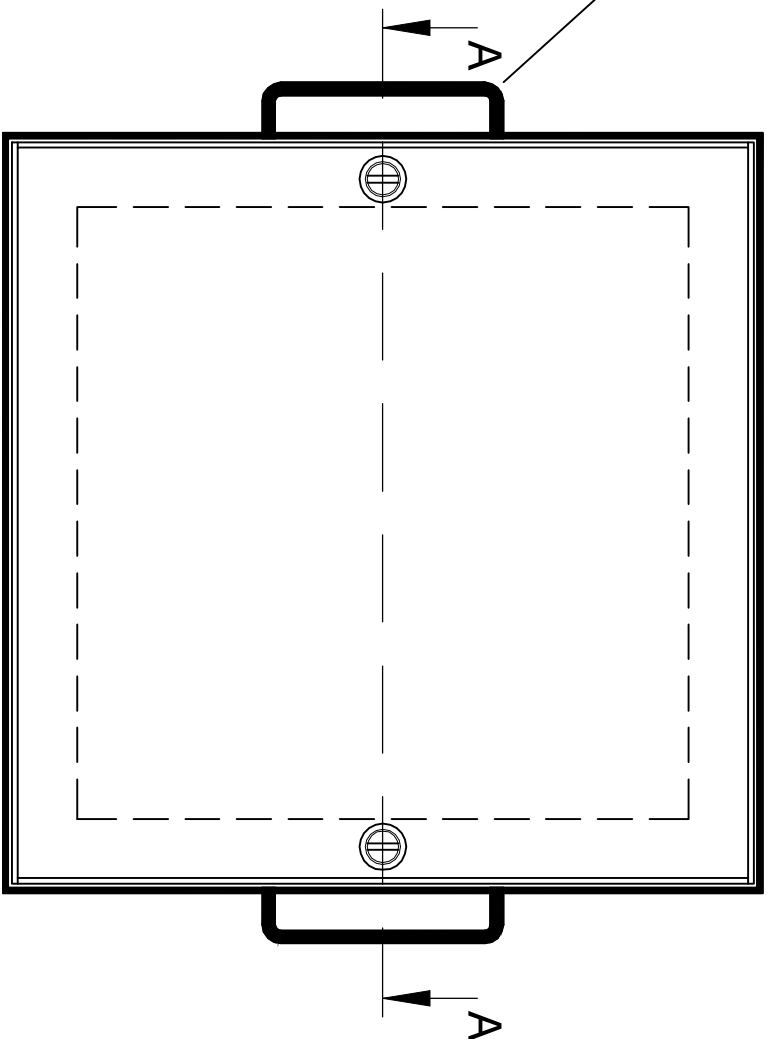

- ALU = Aluminium (3mm gauge)
- GMS = Galvanised Mild Steel (3mm gauge)
- AISI 304 = Stainless Steel Grade 304 (3mm gauge)

Elkington

Elkington GmbH
Baarerstrasse 110B,
6302 Zug, Switzerland,
T: + 41 79 641 33 85
E: info@elkington.eu
www.elkington.eu

Product / Project: / Customer:
SEFAC 50

Drawing Number: Revision:

Scale: Date: **26.02.2014**

Drawn By: **JD** Material: **GMS - AISI 304 - ALU**

Checked By: Drawing Ref: